





E-Pac EKDVCPLT5X

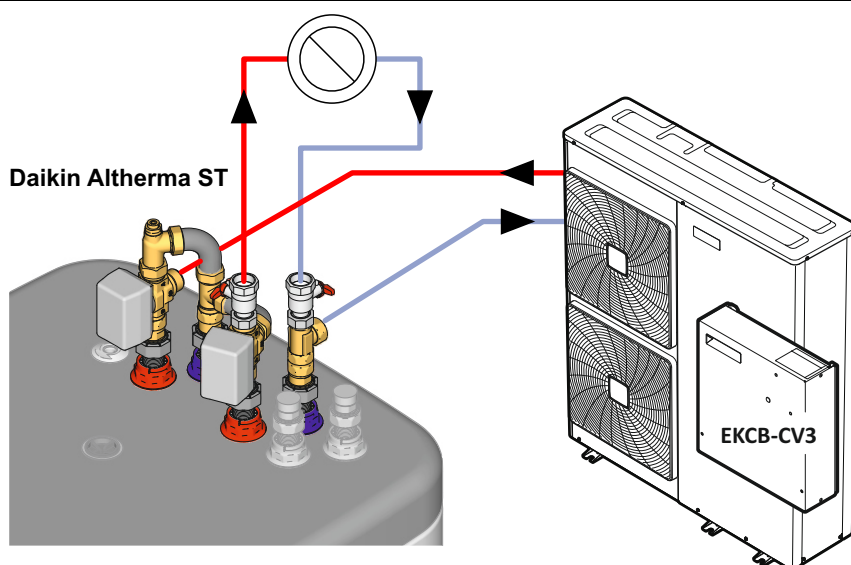

DAIKIN Altherma M

- EBLQ-CV3
- EBLQ011-016CV3
- EBLQ011-016CW1
- EBLQ011-016C3V3
- EBLQ011-016C3W1

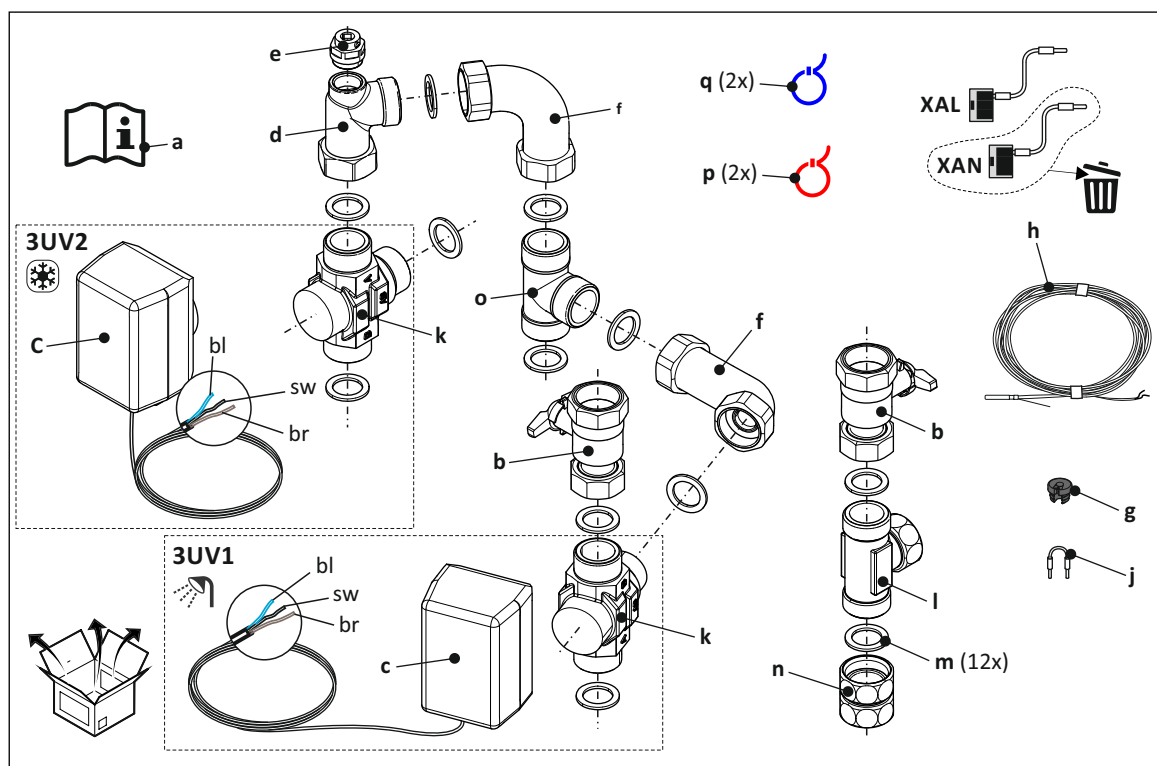

Magyar

polski

română

Slovenščina

Eesti

Lietuvių



Latviski




[EKDVCPLT5X]






Daikin Altherma ST

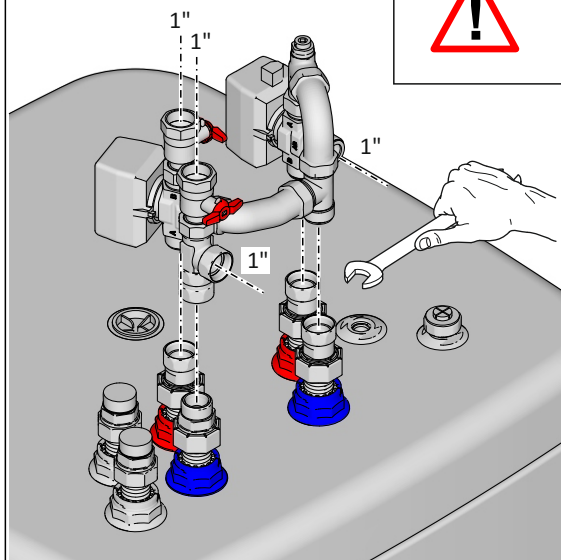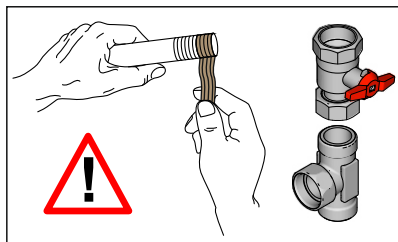



3UV2



3UV1

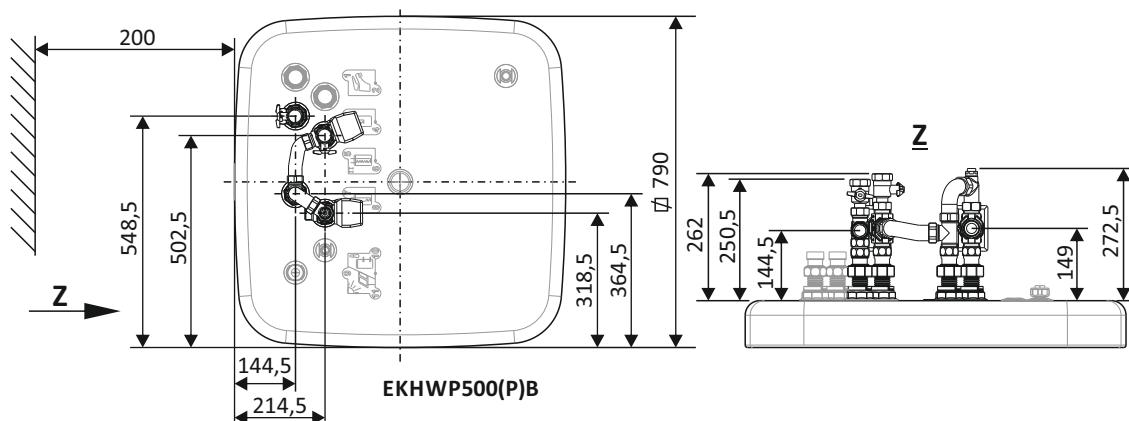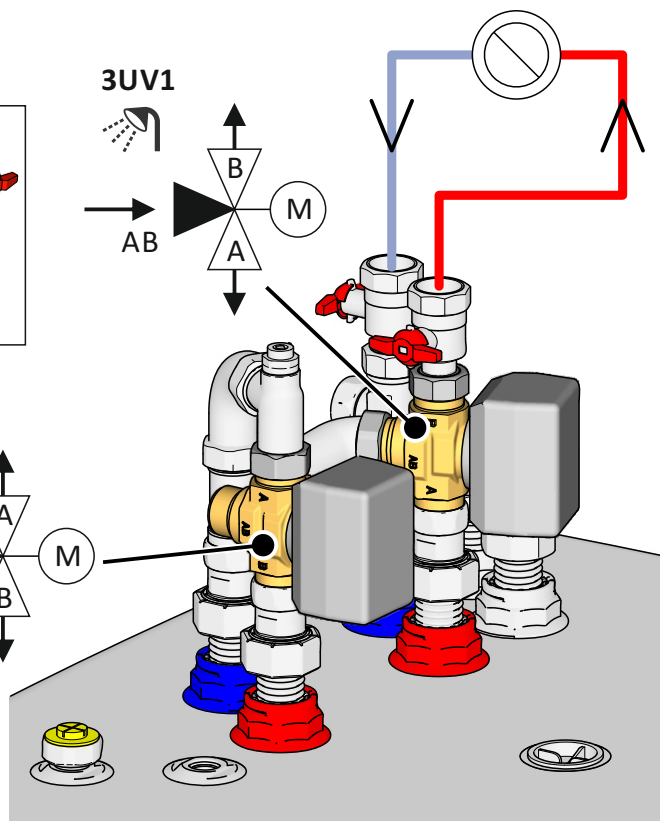

EKHWP500(P)B

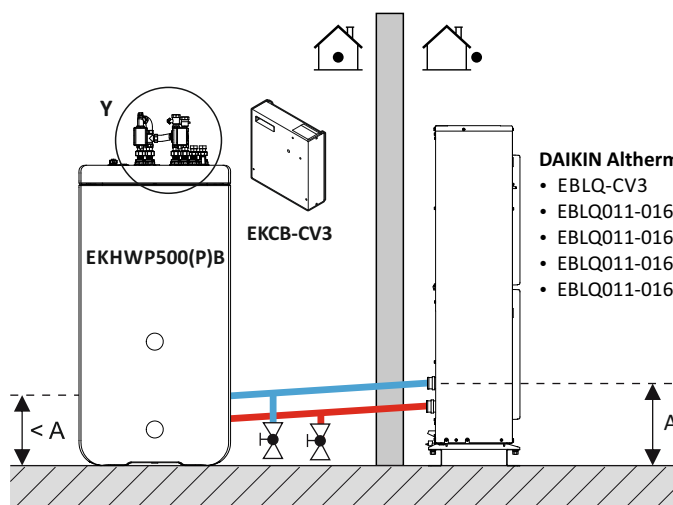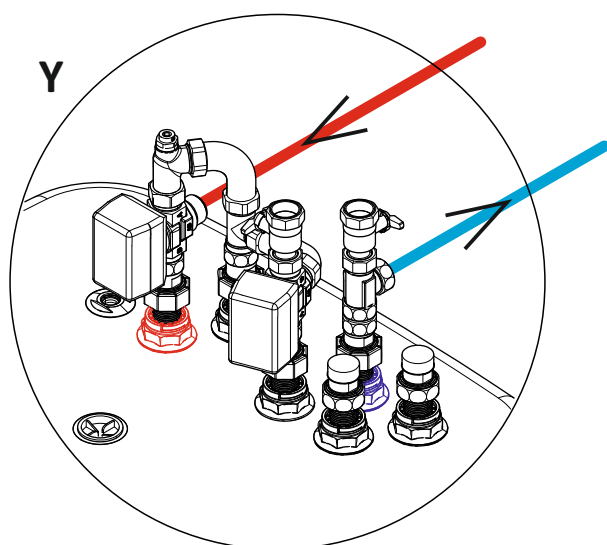

DAIKIN Altherma M



- EBLQ-CV3
- EBLQ011-016CV3
- EBLQ011-016CW1
- EBLQ011-016C3V3
- EBLQ011-016C3W1

	HU	PL	RO	SL	ET	LT	LV
br	barna	brązowy	maro	rjava	pruun	rudas	brūns
sw	fekete	czarny	negru	črna	must	juodas	melns
bl	kék	niebieski	albastru	blue	sinine	mėlynas	zils

**DAIKIN Altherma M**

- EBLQ-CV3
- EBLQ011-016CV3


- EBLQ011-016CW1
- EBLQ011-016C3V3
- EBLQ011-016C3W1

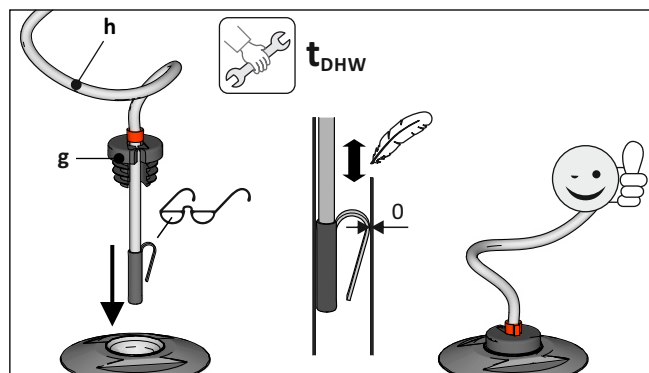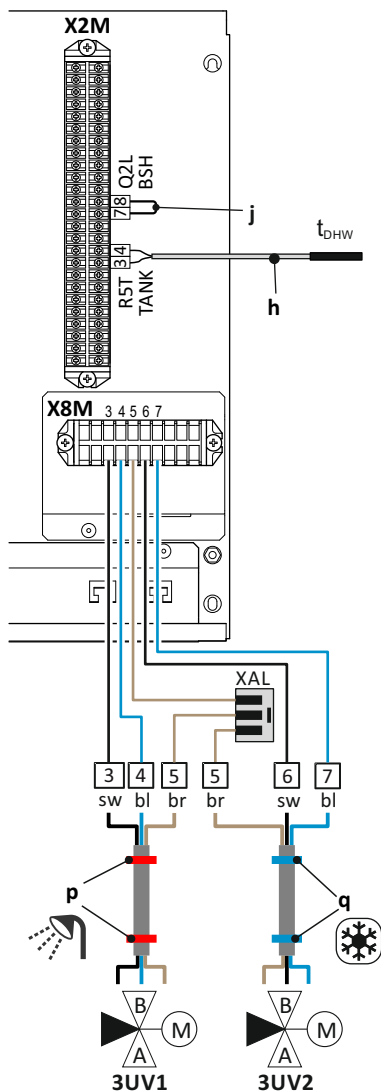**Daikin Altherma ST
EKCB-CV3****EKCB-CV3**

	HU	PL	RO	SL	ET	LT	LV
3UV1	3-járátú szelep + motor	Zawór 3-drogowy + silnik	Ventil cu 3 căi + motor	3-potni ventil + motor	Kolmekäiguline klapp + mootor	3 krypčių vožtuvas + variklis	Trīsceļu vārsts + motors
t_{DHW}	Hőmérséklet-érzékelő + csatlakozóvezeték	Termistor + przewód połączeniowy	Termistor + cablu de conexiune	Termistor + povezovalni kabel	Termistor + ühendusjuhe	Termistorius + prijungimo laidas	Termistors + savienojuma vads
EKCB-CV3	Opcionális doboz integrált hidraulikus alkatrészekkel rendelkező kültéri egységekhez	Skrzynka opcji jednostek zewnętrznych ze zintegrowanymi elementami hydraulicznymi	Cutie de opțiuni pentru unitățile exterioare cu componente hidraulice integrate	Omarica za opcjsko opremo za zunanje enote z vgrajenimi hidravličnimi komponentami	Integreeritud hüdraulikakomponentidega välisseadmete valikute plokk	Pasirinktinė dėžutė lauko įrenginiams su integruotais hidrauliniais komponentais	Papildaprīkojuma kārbā ārā iekārtām ar iebūvētiem hidraulikas komponentiem
Daikin Altherma ST							
EKHWP 500(P)B	Használatimelegvív-tartály (500 l)	Zbiornik ciepłej wody użytkowej (500 l)	Rezervorul apei calde menajere (500 l)	Rezervoar za toplo vodo za ospodinjstvo (500 l)	Kuuma vee paak (500 l)	Buitinis karšto vandens bakas (500 l)	Vietējā karstā ūdens tvertne (500 l)
Daikin Altherma / outdoor Unit							
EBLQ	Daikin Altherma M						




[EKDVCPLT5X]

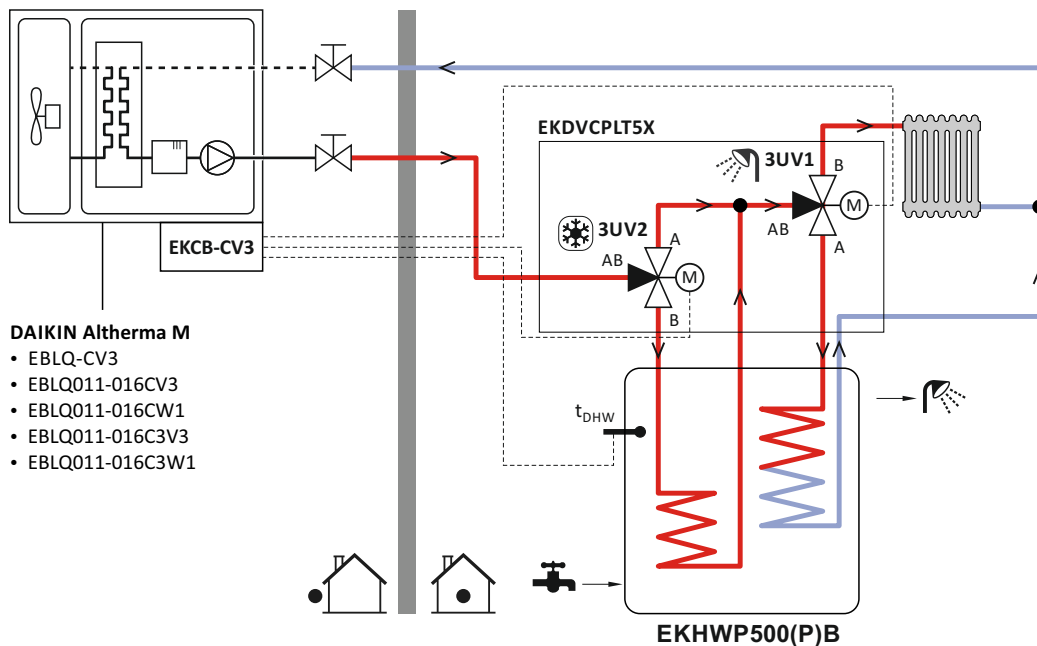

EBLQ + EKDVCPLT5X

HU	PL	RO	SL	ET	LT	LV	
Műszaki adatok	Dane techniczne	Date tehnice	Tehnični podatki	Tehnilised andmed	Techniniai duomenys	Tehniskie dati	
3UV1 / 3UV2							
3-járátű szelep + motor	Zawór 3-drogowy + silnik	Ventil cu 3 căi + motor	3-potni ventil + motor	Kolmekāģuļine klapp + mootor	3 kryptių vožtuvas + variklis	Trīscēļu vārsts + motors	
Üzemi feszültség	Napięcie robocze	Tensiune de funcționare	Obratovalna napetost	Tööpinge	Darbinė įtampa	Darba spriegums	230V / 50Hz
Maximális bemeneti teljesítmény	Maksymalna moc wejściowa	Intrare maximă de putere	Največja vhodna moč	Maksimaalne sisendvõimsus	Didžiausia galios galia	Maksimālā jauda	4,3 W
Védelem típusa	Rodzaj zabezpieczenia	Tipul de protecție	Vrsta zaščite	Kaitse tüüp	Apsaugos tipas	Aizsardzības tips	IP 40
Átfutási idő	Czas realizacji	Timpul de rotație	Čas obratovanja	Käibe aeg	Apsūkimo laikas	Apgrūzījuma laiks	6s
KVS-együttható	Współczynnik KVS	KVS-coeficientul	KVS-koeficient	KVS-koefitsient	KVS koeficientas	KVS koeficients	7,7
Tárolótartály-érzékelő	Czujnik zasobnika	Senzor rezervor de depozitare	Senzor skladiščne posode	Hoiumahuti andur	Sandėliavimo rezervuaro jutiklis	Uzglabāšanas tvertnes sensors	
R _s							
Ellenállási jellemzők	Charakterystyka odporności	Caracteristici de rezistență	Značilnosti odpornosti	Resistentsus iseloomulik	Atsparumo charakteristikos	Pretestības raksturlielumi	

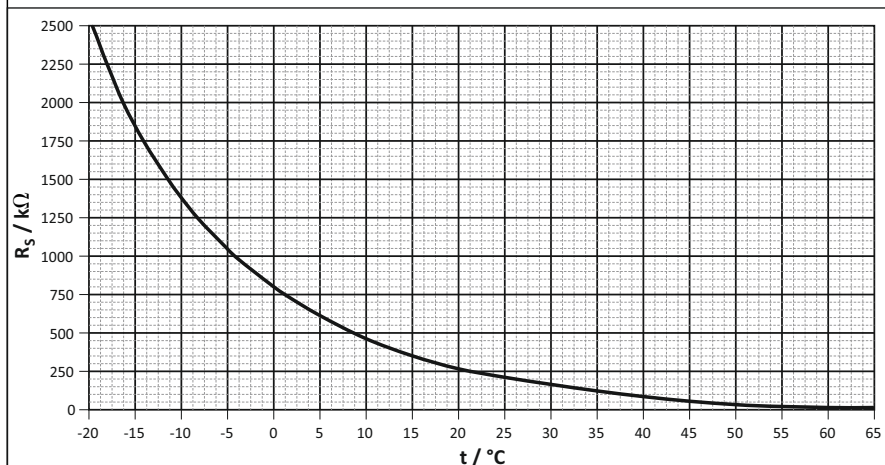

EBLQ + EKDVCPLT5X

DAIKIN EUROPE N.V.

Zandvoordestraat 300, B-8400 Oostende, Belgium

008.1447798 02 02/2020